metallbau emmeln

# SuperRutsche / SuperSlide

from me for fun!

Wir bauen Kinderträume | We build dreams for kids

## SuperRutsche
### Mit den Erweiterungsmöglichkeiten einer Röhren- und Steilrutsche

*Die Superrutsche ist der Klassiker für alle Freizeitparks und großzügig angelegte Spielplätze. Ein Rutschvergnügen für die gesamte Familie.*

**Die Superrutsche |** Die Superrutsche besteht aus mindestens 4 Bahnen und ist aus glasfaserverstärktem Kunststoff hergestellt. Gerutscht wird auf Kokosmatten, durch die relativ gleichschnelles Rutschen erreicht wird. Durch die wellenförmige Ausbildung wird ein Beschleunigungseffekt erzielt, mit dem die Rutsche weiter an Attraktivität gewinnt. Die Rutsche kann im Freien aber auch in Indoor-Parks montiert werden.

**Ausstattung |** 4 oder mehr Rutschbahnen parallel, Farben wählbar nach RAL. Stahlunterkonstruktion feuerverzinkt und/oder lackiert. Treppenausführung gem. DIN, entsprechend den örtlichen Gegebenheiten. Startpodest nach Wahl mit Podesthaus, auf Wunsch auch thematisiert. Ergänzungsmöglichkeiten durch Elastikplatten, eine Röhrenrutsche und Steilrutsche aus Edelstahl sind möglich. Der Auslauf wird mit einer Gummi-Gewebematte belegt, durch die ein gleichmäßiges Abbremsen erreicht wird. Rutschmatten, Aufbewahrungsbehälter, Einzäunung und Werbetafeln werden ebenfalls angeboten.

**Besonderheiten |** Durch eine spezielle Mixtur wird die Oberfläche der Rutsche extrem hart und abriebbeständig. Hierdurch erzielen wir eine hohe Wertbeständigkeit.

**Varianten |** Die Superrutsche wird standardmäßig mit 6 Bahnen und einer Podesthöhe von 9 m geliefert. Wir liefern die Superrutsche aber auch oft mit 7 m und 5.20 m Podesthöhe sowie mit 4 oder 8 Bahnen.
Eine Röhrenrutsche wird aus Edelstahl angeboten und hat bei einer Podesthöhe von 9 m eine Rutschlänge von 25 m und einen Röhrendurchmesser von 95 cm.
Eine Steilrutsche mit einem Neigungswinkel von 60° wird ebenfalls aus Edelstahl hergestellt. Der obere Bereich wird durch eine transparente Abdeckung getunnelt.

**Montage |** Für die Montage müssen Fundamente sowie eine Auslaufplatte von 10 m Länge erstellt werden. Es wird ein Kran benötigt, der eine Tragkraft von 3 t, bei einer Auslage/Hakenhöhe von 15 m hat.

# SuperSlide

## With the additional possibilities of a tunnel slide and a steep slide

*The superslide is the classic attraction for all amusement parks and spacious playgrounds. Not only children but also teenagers and adults enjoy that experience.*

**The superslide |** The superslide consists of at least 4 sliding lanes and is manufactured of fiberglass reinforced polyester. Visitors slide on coir fiber mats all approximately in same speed. The undulated shape allows to obtain an acceleration effect, which imparts additional attractiveness to the slide. It can be installed outside as well as in indoor parks.

**Equipment |** 4 or more sliding tracks parallel, colours can be chosen from RAL range. Stairs design to DIN standards, according to the local conditions of installation. Start platform optionally with shelter, also with theming on request. Possibility of complementing with elastic plates, tubular slide and steep slide made of stainless steel are possible. The outlet is overlaid with a rubber fabric mat to obtain regular braking motion Slide mats, storage box, fence and advertising panels are also proposed.

**Special qualities |** The sliding lanes are coated with a special resin particularly resistant to abrasion. Therefore we come to a high stability.

**Variations |** The superslide standard delivery is with 6 sliding lanes and a platform height of 9 m. Alternatively we deliver with a platform height of 7 m and 5.20 m as well as with 4 or 8 sliding tracks. A tunnel slide made of stainless steel can be offered with a platform height of 9 m and a length of 25 m. The tunnel diameter is 95 cm. A steep slide with a slide angle of 60° also is manufactured out of steinless steel. The sector above is tunnelled with a transparent cover.
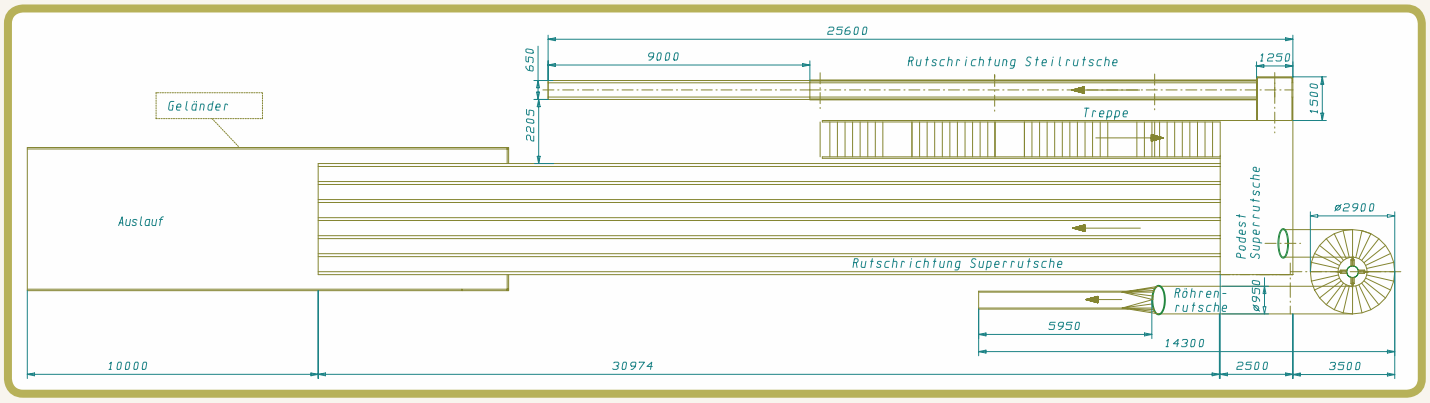
**Assembly |** Mounting requires foundations as well as a slowdown plate with a length of 10 m. Provided that the erection site is directly accessible, a crane with a carrying force of 3t as well as a length of jib/height of lift of 15 m will be needed.